



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁶ : H04N 7/18	A1	(11) International Publication Number: WO 98/51081 (43) International Publication Date: 12 November 1998 (12.11.98)
---	-----------	---

(21) International Application Number: PCT/CA98/00439
(22) International Filing Date: 6 May 1998 (06.05.98)
(30) Priority Data:
60/045,811 7 May 1997 (07.05.97) US
(71)(72) Applicant and Inventor: BLAIR, Scott [CA/CA]; 32 Marlow Avenue, Toronto, Ontario M4J 3T9 (CA).
(74) Agent: RIDOUT & MAYBEE; 18th floor, 150 Metcalfe Street, Ottawa, Ontario K2P 1P1 (CA).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published
With international search report.

(54) Title: SUBWAY TV MEDIA SYSTEM

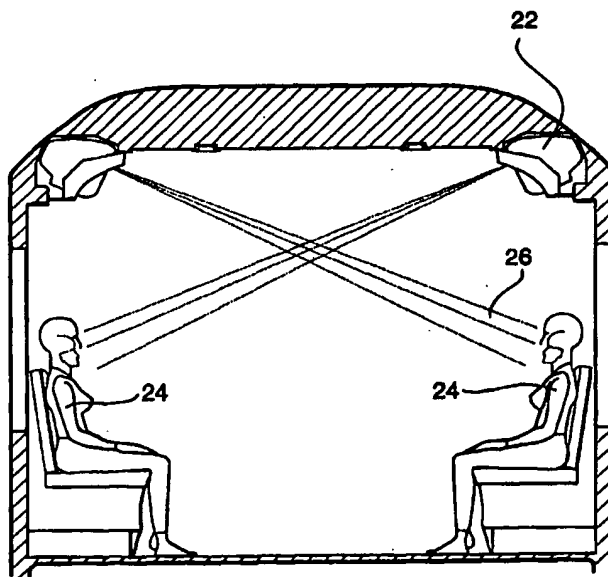

(57) Abstract

A television system for subway cars (10) includes a plurality of TV monitors (22) mounted at intervals along the cars (10), at the junction of the sidewall and the ceiling, and a central video signal source unit (23) such as a video tape player, video disk player, computer-based digital video recorder or television receiver, connected to the video monitors (22). Programs of short duration, e.g. 5-15 minutes, matching the average length of a subway ride, and comprising advertising messages, news bytes and the like are played and displayed in the monitors repeatedly during the subway ride.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

SUBWAY TV MEDIA SYSTEM

5 This invention relates to video display systems,
and more specifically to video display systems mounted in
and operating in mass transit subway cars.

10 It is commonplace to provide visual advertising
displays such as posters in mass transit subway cars, where
the displays are available for reading by subway passengers
during travel. It is also known to equip subway cars with
closed circuit television cameras, for surveillance of
passenger behaviour and other safety checks. Images of
such surveillance are either displayed at a central
security facility, or recorded for subsequent viewing in
15 the event of safety problems.

It is also commonplace to equip subway cars with
audio public address systems for a myriad of uses,
including transit service announcements, community service
20 events, advertising, safety and emergency procedures, as
well as inter-staff communications.

Proposals have been made previously to equip
other transportation items, especially aircraft, with
25 television or video systems, primarily for the
entertainment of passengers on long journeys. Examples of
such systems in the patent literature can be found in U.S.
Patent 4,647,980 Steventon et al., U.S. Patent 4,630,821
Greenwald, U.S. Patent 4,352,124 Kline, U.S. Patent
30 5,123,728 Gradin et al., and U.S. Patent 3,457,006 Brown et
al.

Entertainment of passengers on subway cars has
until now generally been ignored, since the average journey
35 taken by a passenger on a mass transit subway system is
usually short, lasting perhaps fifteen minutes.

- 2 -

Nevertheless, subway transit riders offer an attractive audience for visual advertising messages, as evidenced by the proliferation of advertising signs which commonly adorn a subway car. In addition, mass transit systems such as
5 subways are in need of extra sources of revenue, to keep passenger fare structures at an affordable level as operating costs rise, and to avoid decreased ridership as a result.

10 It is an object of the present invention to provide a public service message display system, entertainment system and advertising system for mass transit subway cars.

15 It is a further object to provide a novel source of extra revenue for a mass transit subway system.

The present invention provides a television public service message display, entertainment and
20 advertising system for subway cars, in which television monitors are provided at spaced intervals in subway cars, to display short duration televisual entertainment and advertising features to subway riders. The system is designed so that advertising spots on it can be sold by the
25 transit system to potential advertisers and sponsors, for extra revenues for the transit system. It takes advantage of the fact that subway riders are, for the most part, occupying a subway car under relatively crowded conditions but for only a relatively brief duration. They are looking
30 for something on which to focus their attention during their brief ride, whilst at the same time often finding it inconvenient to open newspapers, magazines or the like under crowded circumstances and becoming bored by static advertising or other displays around them. The present

- 3 -

invention provides properly positioned television monitors displaying moving images of news items, advertising material and the like, viewable by substantially all riders in the car, and filling their need for visual entertainment during the brief duration of their subway ride.

Thus, according to the present invention, from one aspect, there is provided a video system for displaying televised material to passengers in a mass transit subway car, and comprising at least one video display monitor adapted for mounting inside a subway car so as to display televised materials to passengers riding therein, and a video signal source unit operatively connected to said at least one monitor.

According to a second aspect of the present invention, there is provided a subway car for mass transportation and comprising a video display system including at least one video display monitor having a video screen, the monitor being mounted in the subway car in a manner such that the video screen thereof is readily visible to passengers in the subway car, and a video signal source unit operatively connected to said at least one monitor.

The term "video signal source unit" as used herein embraces player units for playing pre-recorded video material, such as computer-based digital video recorders (including CD-ROM players), video tape players and video disk players, and television receivers for receiving live or pre-recorded broadcast television signals from a remote transmitter and supplying these to the video display monitors mounted in the subway cars. One system according to the invention utilizes receivers including computer-

- 4 -

based digital video recorders for receiving broadcast television signals from a remote transmitter as the video signal source unit. Such video signal source unit can be located either within the mass transits' premises or on a remote broadcasting site. Alternatively, the invention utilizes a video tape player, a video disk player, or a computer-based digital video recorder, as the video signal source unit. The video signal source unit may be located in the same subway car as that in which the monitor or monitors are located, or in adjacent or remote cars of the same train, with the necessary operative connection between the player and the monitor(s). An individual subway car can be equipped with its own video signal source unit, connected to a plurality of monitors mounted at different, appropriately chosen locations along the length of the subway car. Alternatively, one central video signal source unit can be located in one car of subway train, and connected to monitors in some or all of the cars of the train, to provide a central video signal source unit for the train.

Computer (PC) based digital video recorders basically transmit video signals from a hard drive or CD-ROM storage. They are however also capable of receiving transmitted input at intervals, e.g. news item updates, at, say, hourly intervals, to add to their stored transmittable video data. In this sense they also act as television receivers.

The video signal source unit and video display monitors used in the present invention can be of known, standard form, obtainable as off the shelf items from manufacturers and sales outlets. The connections between them, for display of televised material, are also standard

- 5 -

and well within the skill of the art. For example, use can be made of the existing subway infrastructure by which audio announcements are currently transmitted. Alternatively, the connections may be by use of coaxial
5 cables, fibre optics, cell phone systems or satellite transmission, or by other appropriate means.

A preferred system according to the invention is a subway car or plurality of subway cars equipped with a
10 plurality of television monitors, especially LCD-based television monitors, and a video signal source comprising a video tape player, video disk player or computer-based digital video recorder, the video signal source and the monitors being interconnected by suitable electrical cable
15 systems which are self-contained within the subway car. In this way, new subway cars can be built with the video system or parts thereof installed, and usable on substantially any transit system, since the operation of the video system is independent of any previously installed
20 track, tunnel or control systems.

The video system according to the present invention provides a means for communicating a very wide range of information to viewers in an environment ideally
25 suited to communicating short video messages to viewers, especially commercial messages or sponsored community service, or informational news bytes. Most subway rides are of short duration, e.g. 15-30 minutes or less. It is normally undesirable to play television programs of any
30 significant length to subway passengers for fear of distracting them from their proper points of interchange and disembarkation on the subway system. However, the system according to the invention is ideally suited for displaying a series of short, 30 second - 1 minute

- 6 -

messages, in sequence, such as a series of commercial messages. These can range from straightforward advertising as seen on commercial television, or the type of news feed with corporate sponsorship as seen by cable television viewers, with news services provided by specialized companies in this business. If the information is delivered by video tape player, video disk player or computer-based digital video recorder, it can be repeated at intervals of, say, 5-15 minutes, based upon the average duration of individual subway rides, i.e. the pre-recorded program is of total duration of about 5-15 minutes. If the feed is delivered from an outside source, its delivery depends on the package of the server, and according to agreement between the purchaser and the mass transit management, and other interested parties as necessary.

Typically, the television images displayed by the monitors of the system according to the invention do not incorporate sound, though they may contain rolling script, similar to cable television news channels, or similar to closed-captioning for the hearing impaired. This avoids risk of interference with announcements being played to passengers through the normal audio address system carried by the subway train, and avoids adding to the general noise level experienced by passengers on the subway cars, a noise level which is commonly quite high even under normal running conditions. However, sound may be incorporated where appropriate, for example in safety or emergency situations, or to mark the beginning of a message to which the subway or transmission provider wishes to call attention.

The manner in which the video display monitors are disposed and mounted in the subway car depends to some

- 7 -

extent on the design of the subway car itself. Such designs can vary between different subway systems. Normally from 6-12 such colour monitors are provided in each subway car, suitably of 12"-13" size, spaced along the length of the car, and disposed above the windows of the car, in a manner and at a location which does not interfere with the operation of any other essential element of the car (door operation, lights, heating, air conditioning etc.). A subway car is normally constructed so that it has a cavity wall, defined between its outer structural shell and its inner lining wall, the cavity providing for wiring and cables and other mechanical functions, and, at places, containing insulation. The video display monitors in the system of the invention are suitably mounted in the cavity wall.

In a preferred arrangement, the video display monitors have a strong metal frame construction, fixed to the frame of the subway car. The screens are preferably covered with a rigid transparent unit, e.g. of polycarbonate, shaped to coincide with the shape of the internal wall of the subway car at the location of mounting. For example, when the monitor is mounted at the junction of the wall and ceiling of the subway car, where there is commonly provided a concavely curved segment of internal wall, the transparent cover unit is suitably similarly concavely curved, so that it can be mounted as a continuum with the internal walls and blended to contours thereof, with the monitor mounted behind it. The screen is suitably angled downwardly, for best viewing by passengers seated opposite the screen. The entire structure of the monitor, including the cover unit if used, is suitably housed in a stainless steel or strong plastic casement, designed to appear integral with the subway car, without

- 8 -

visible edges or protuberances, and matching the materials and colours of the subway car interior.

5 The video monitors used in the system of the present invention can be of standard, cathode ray tube-based design. Such monitors have the advantage of economy, being mass-produced items manufactured on a very large scale. They are eminently suitable for use in most
10 embodiments according to the invention, and can be viewed clearly from a variety of angles. However, in circumstances where the subway car in operation encounters locations of large magnetic field, it is possible that the picture displayed on a CRT monitor will be distorted as the monitor moves through such location. Any such distortion effect
15 can be reduced by surrounding the monitor, to an extent practical and consistent with its provision of full visual display, with an appropriate shield such as a steel or other ferromagnetic casement. Where such a magnetic field problem turns out to be particularly acute, the CRT-type
20 monitor may be replaced by a monitor incorporating a colour liquid crystal display (LCD) screen, which is not sensitive to intermittent encountering of external magnetic fields.

 Specific preferred embodiments of the present
25 invention are illustrated in the accompanying diagrammatic drawings in which:

 Figure 1 shows in plan view (Fig. 1A) and in side elevation (Fig. 1B), an existing subway car as used on the
30 Toronto Transit System with indications of appropriate locations for mounting video monitors according to the invention;

- 9 -

Figure 2 is a sectional view of a subway car according to the invention with video monitors in place;

5 Figure 3 is a detail, in section, of an existing subway car illustrating the location for receiving a video monitor according to the invention;

10 Figure 4 is a detail similar to Fig. 3, with the video monitor in place;

Figure 4A is a view, similar to Fig. 4, of an alternative embodiment;

15 Figure 5 is a detail in perspective view, of a subway car equipped with a monitor according to one embodiment of the invention;

20 Figure 6 is a detail similar to Fig. 5 but of a further alternative embodiment;

Figure 7 is a view similar to Figure 6, showing the general appearance when the monitor is operating.

25 A typical subway car 10, as illustrated in Figs. 1A and 1B, is equipped with sliding doors 12 and windows 14, spaced at convenient intervals along the length of the car. Passenger seats, in sets of 2's and 3's, are disposed beneath and alongside the windows 14, clear of the doors 12, some sets 16 being inward facing, other sets 18 being
30 forward facing and other sets 20 being rearward facing.

Suitable locations for video monitors 22 in accordance with the invention are at the junction of wall and ceiling of subway car 10, above the windows 14 and

- 10 -

clear of the doors 12. They are thus disposed opposite to sets of inward facing seats 16, and angled downwardly for ease of viewing of passengers 24 seated in such inward facing seats 16, as shown in Fig. 2, with direct sight lines 26, but visible to passengers seated elsewhere, and standing in the car 10. A video player 23 is suitably located in the driver's cab 27 (Fig. 1A), and connected to all the monitors 22 by cables (not showing) disposed in the cavity walls of the car.

10

Fig. 3 shows a detail of the car 10, at the location where a monitor 22 is to be installed. The car wall has an outer shell 28 in which windows 14 are sealingly mounted, and structural pillars 30 mounted at intervals and secured to the vertical structural member 32. Centrally secured to the exterior skin and body structure of body 34 of the car is a main air duct 36 and a housing 38 carrying ceiling lights running substantially the full length of the car 10. The space between the ceiling housing 38 and the top of the pillars 30 is normally occupied by back lit advertising panels 40. Removal of appropriate portions of these panels 40 provides space for location of video monitors 22, according to the preferred embodiment of the invention.

25

Thus as shown in Fig. 4, the video monitor 22 is enclosed and rigidly mounted in its own enclosure 42, of stainless steel, rigid plastic or the like. The enclosure in turn is secured to the top of structural pillar 30 and the side of housing 38, in a space between the ends of illuminated panels 40, and protruding rearwardly to a position adjacent the outer part of the exterior skin and body structure 34. The front wall of enclosure 42 is comprised of a clear transparent polycarbonate shield 44,

30

- 11 -

through which the screen 46 the monitor 22 is clearly visible. The screen 46 is angled downwardly for best viewing by a passenger 24 seated opposite. The enclosure 42 with monitor 22 therein and connections protruding outwardly therethrough is removable as a unit, for replacement or service.

An alternative embodiment is illustrated in Fig. 4A, a view similar to that of Fig. 4. In this alternative embodiment, CRT video monitor 22 is replaced with an LCD-based video monitor 22A which is of thin, rectangular cross-section, and occupies less space in the ceiling structure of the car. Accordingly, it can be moved towards the ceiling so that its viewing screen is substantially flush with or even behind the light panel 40. This use of an LCD-based monitor gives a better aesthetic appearance to the inside of the subway car as a whole, as well as improving the display performance by minimizing the interference effects, as previously discussed. An appropriately shaped enclosure 42A for the LCD-based monitor, with transport screen 44A, replaces enclosure 42 for the CRT video monitor, and is similarly mounted in place.

Fig. 5 shows a front, perspective view of the arrangement shown in section in Fig. 4. The monitor 22 and its covering shield 44 are recessed behind the upper portion of the adjacent advertising panels 40, and the sides of the enclosure 42 protrude inwardly from the lower portion of panels 40. This provides ease of access to the enclosure 42 for its removal when necessary.

An alternative arrangement is shown in Fig. 6. Here the polycarbonate shield 44 is convexly curved, and is

- 12 -

disposed further forward from the monitor screen 44. The shield 44 now blends with forward facing part 48 the exterior skin and body structure 34, to provide a perhaps more aesthetically appealing arrangement. In Fig. 7, there is diagrammatically illustrated the arrangement of Fig. 6 in practical operation. Poster-type illuminated advertisements are provided by advertising panels 40 flanking the video monitors 22, whilst the video monitor 22, disposed at intervals along the length of the car 10, show video information and/or advertising spots, at convenient, easily viewed locations and disposition to passengers riding in the car 10.

It will be appreciated that the specific embodiments illustrated and described herein are by way of example only, and are not to be construed as limiting on the scope of the invention. The description pertains specifically to the type of subway car currently in use in the Toronto Transit System, and illustrates a means and location for mounting the video monitors in such a system. Details of construction, and hence details of appropriate mounting for video monitors may differ from subway system to subway system according to the form of car in use. Such mounting details do not depart from the scope of the present invention. In all cases, it is contemplated that a plurality of monitors will be provided in each car, each rigidly mounted at a convenient location clear of the doors and windows, and at a disposition where it can be viewed by passengers riding the subway car, without difficulty. The provision of such video monitors mounted in their own enclosures as described herein, and faced with a transparent screen of, for example, polycarbonate, allows for considerable variation in the detail of mounting means and locations, to adapt them to different constructions of

- 13 -

subway cars currently in use on different mass transit systems.

- 14 -

CLAIMS:

1. A video system for displaying televised material to passengers in a mass transit subway system, and comprising at least one video display monitor adapted for mounting inside a subway car so as to display televised material to passengers riding therein, and a video signal source unit operatively connected to said at least one monitor.

2. The video system of claim 1 comprising a plurality of video display monitors operatively connected to a single video signal source unit.

3. The video system of claim 2 wherein the video signal source unit comprises a video tape player, or video disk player or computer-based digital video recorder.

4. The video system of claim 3 wherein the video signal source system includes a pre-recorded video transmission program for feeding to display on the monitors of duration about 5-15 minutes.

5. The video system of claim 4 wherein the program is repeatable, and includes a series of commercial messages of 30 second - 1 minute duration.

6. The video system of any preceding claim wherein the video monitors are secured to the subway car at a location of junction between wall and ceiling of the car, with the screens of the monitors directed obliquely downwardly towards the car seats.

- 15 -

7. The video system of any preceding claim which is sound free.

8. The video system of claim 1 or claim 2 wherein the video source unit is a television receiver for receiving broadcast television signals from a remote transmitter and supplying the signals to the video display monitors.

9. The video system of any preceding claim, in which the video display monitors include LCD screens.

10. A subway car for mass transportation and comprising a video display system including at least one video display monitor having a video screen, the monitor being mounted in the subway car in a manner such that the video screen thereof is readily visible to passengers in the subway car, and a video signal source unit operatively connected to said at least one monitor.

11. The subway car of claim 10 including a plurality of said monitors, spaced along the length of the car on opposed sides thereof.

12. The subway car of claim 11 including longitudinal opposed sidewalls and a ceiling adjoining the sidewalls, and wherein each said monitor is mounted at the junction of the sidewall and ceiling, with the screens of the monitors directly obliquely downwardly towards the car seats.

13. The subway car of claim 12 wherein the video monitor screen is substantially flush with the adjacent wall surface structure of the car.

- 16 -

14. The subway car of any of claims 10-13 wherein the video signal source unit comprises a video tape player, a video disk player or computer-based digital video recorder.

15. The subway car of any of claim 10-14 wherein the video monitors include LCD screens.

16. The subway car of any of claims 10-15 including a self-contained wiring-cabling system connecting the video monitors to the video signal source unit.

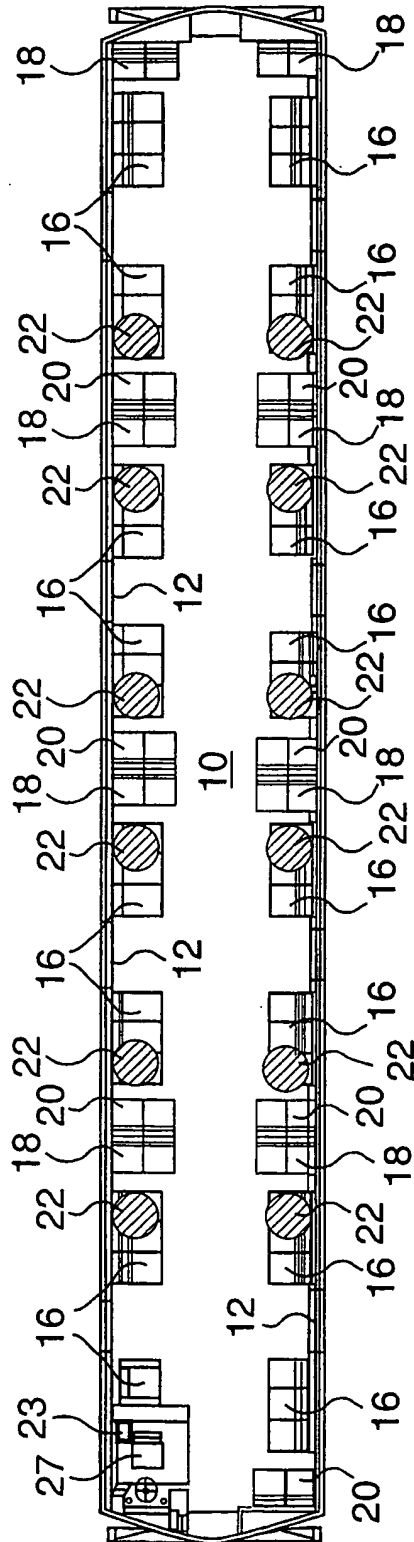


FIG. 1a

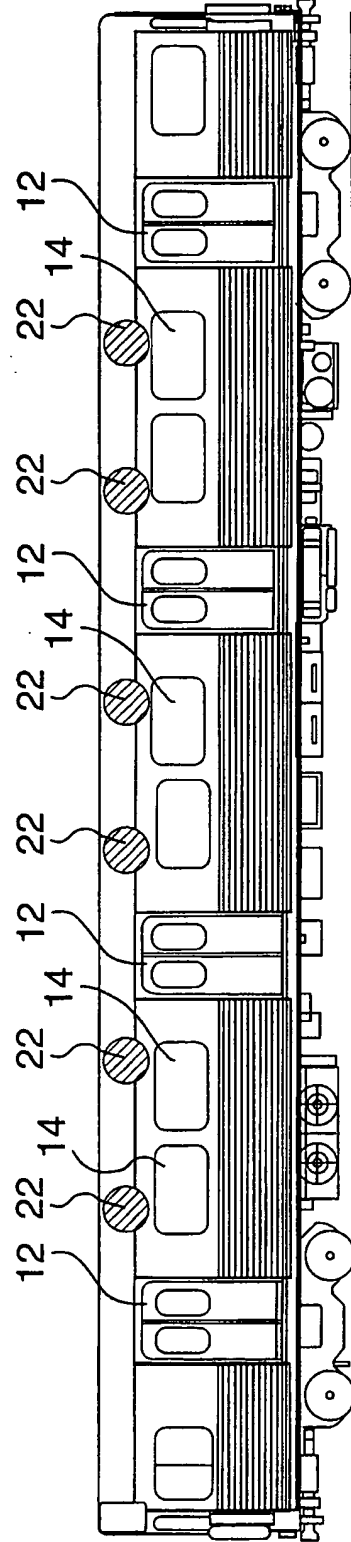
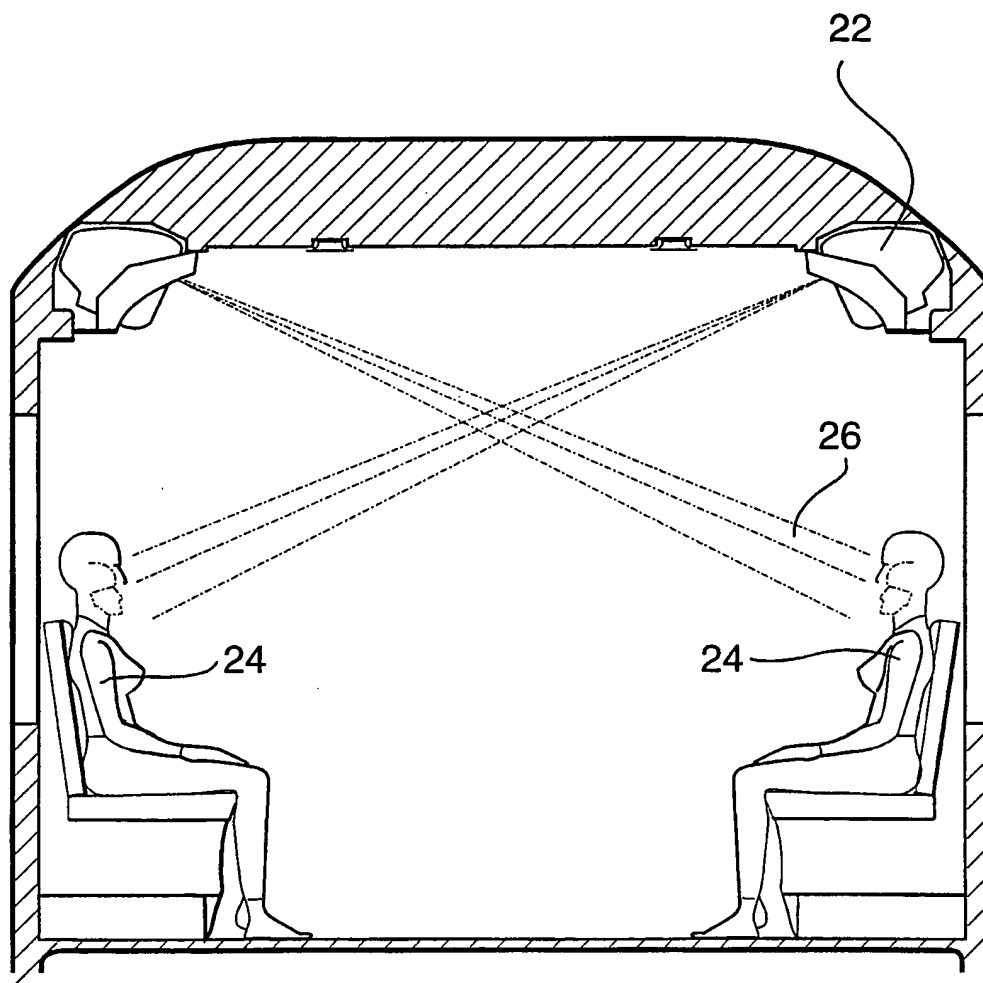


FIG. 1b

2/6

**FIG.2**

3/6

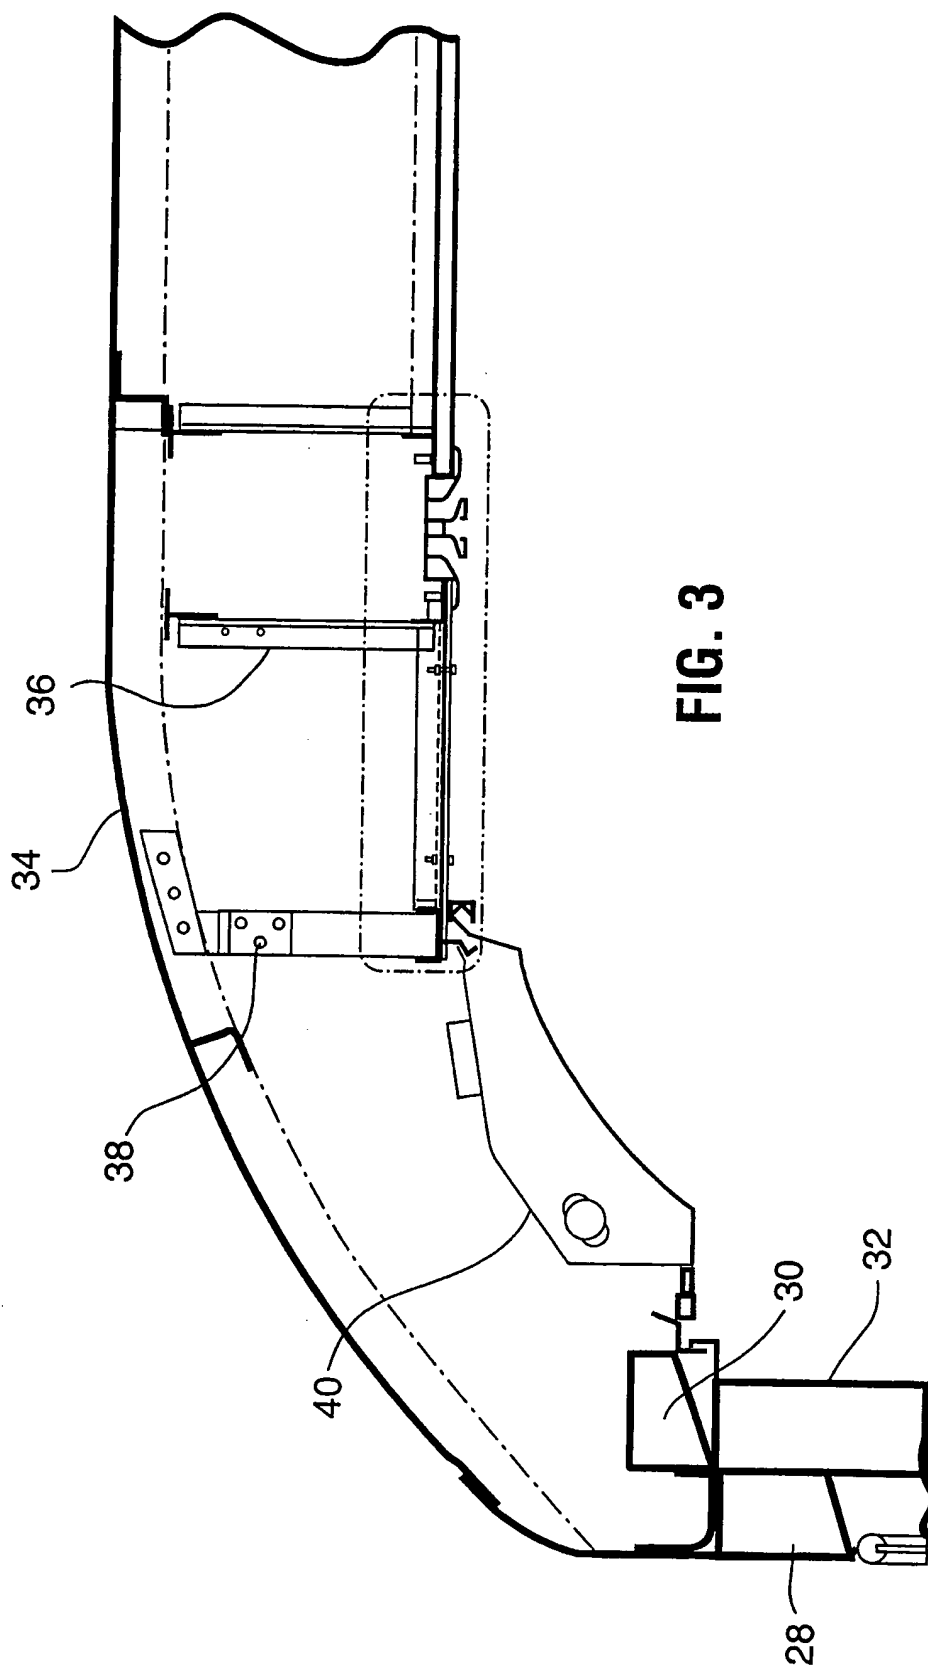
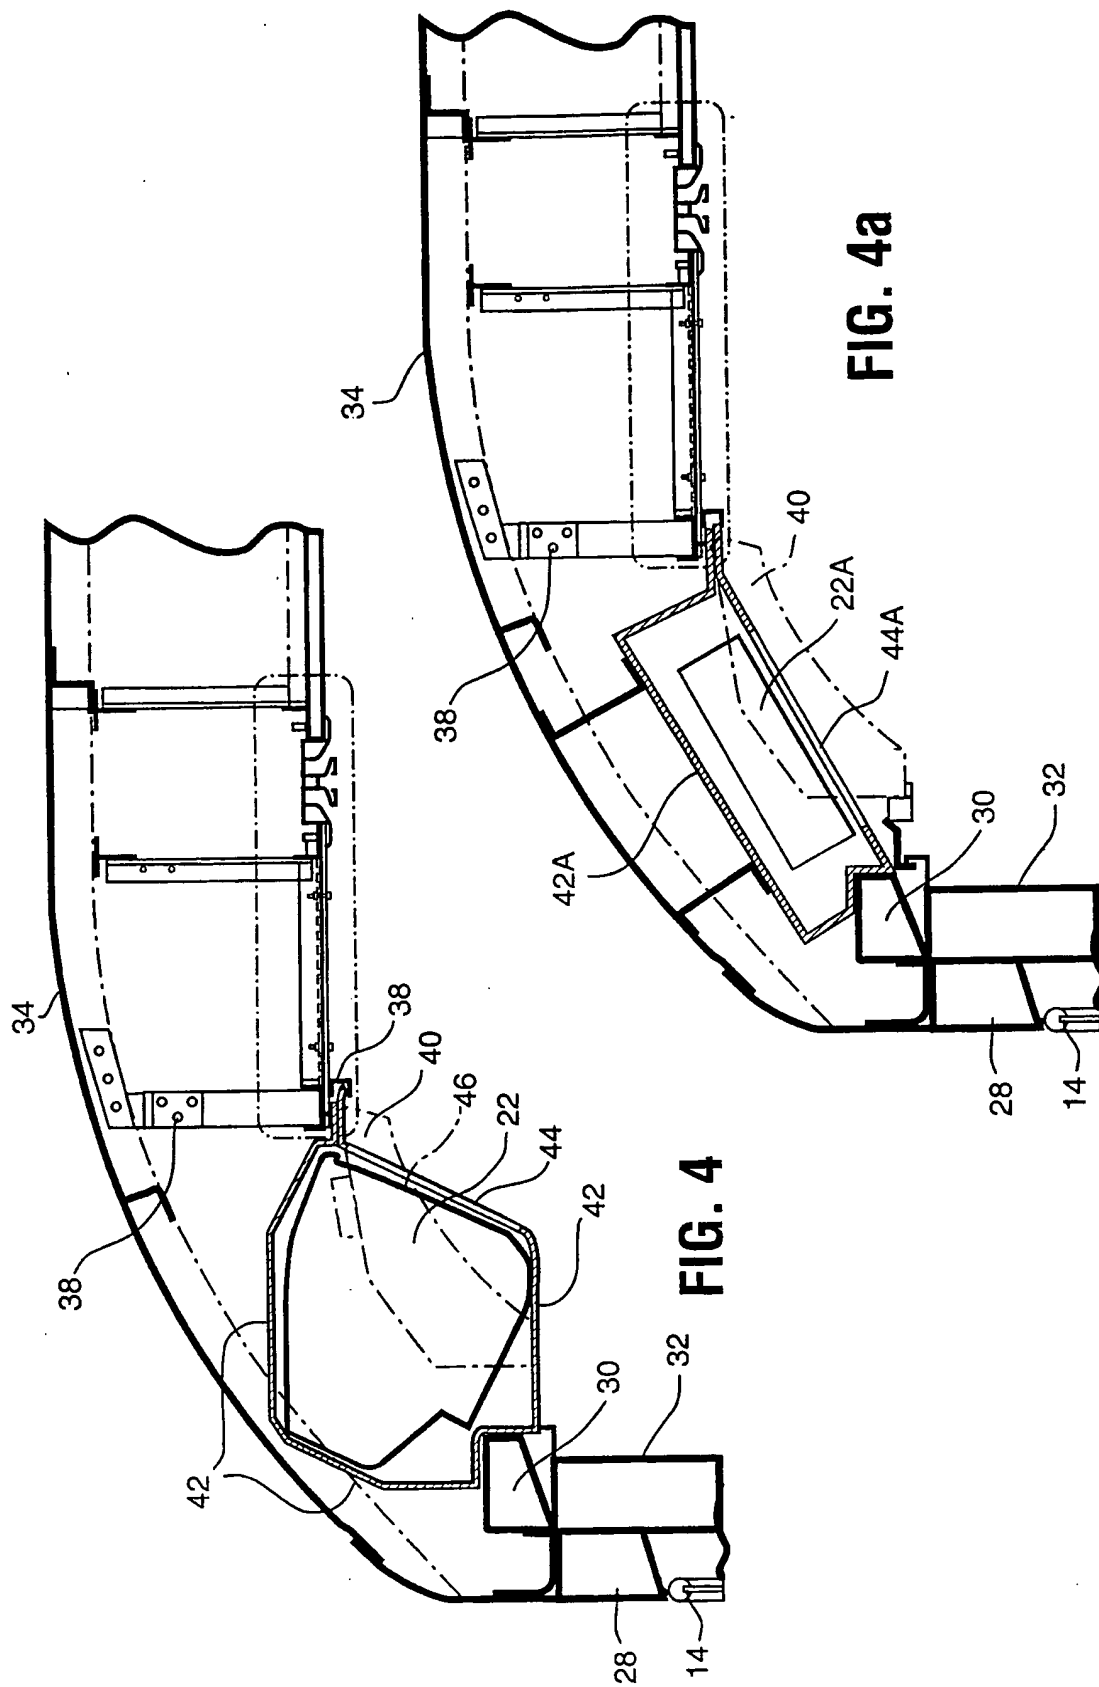


FIG. 3

4/6



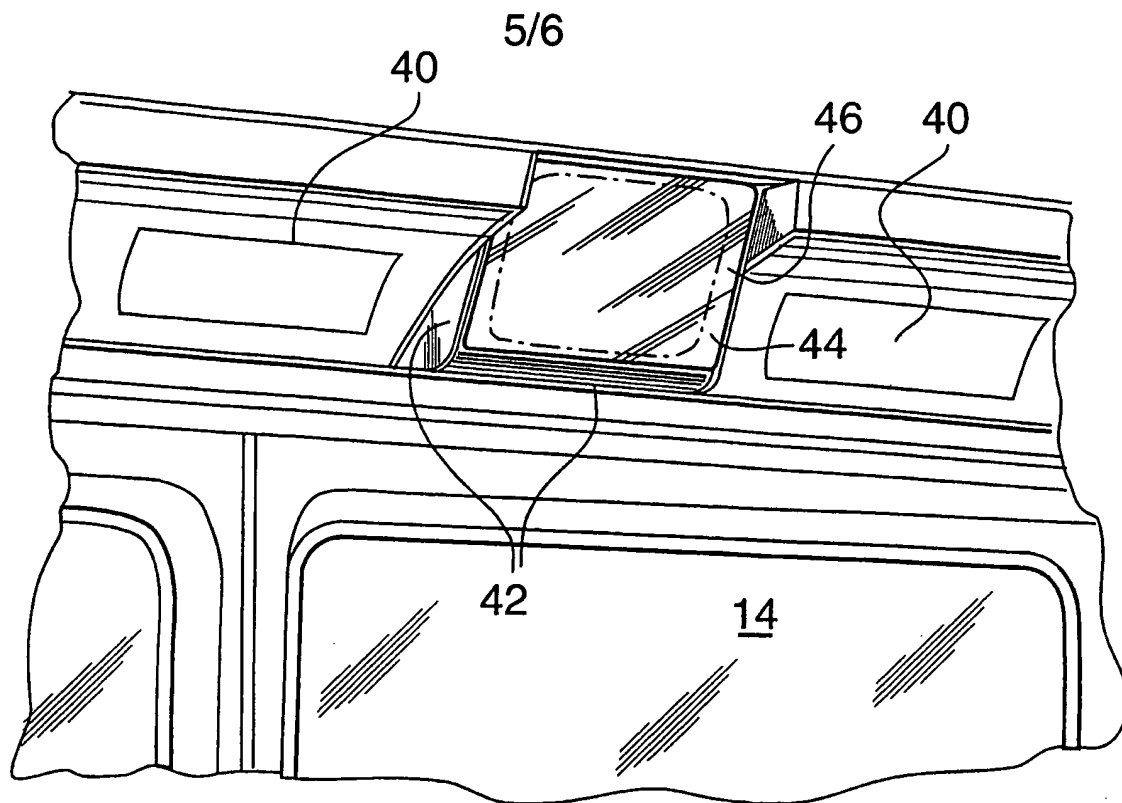


FIG. 5

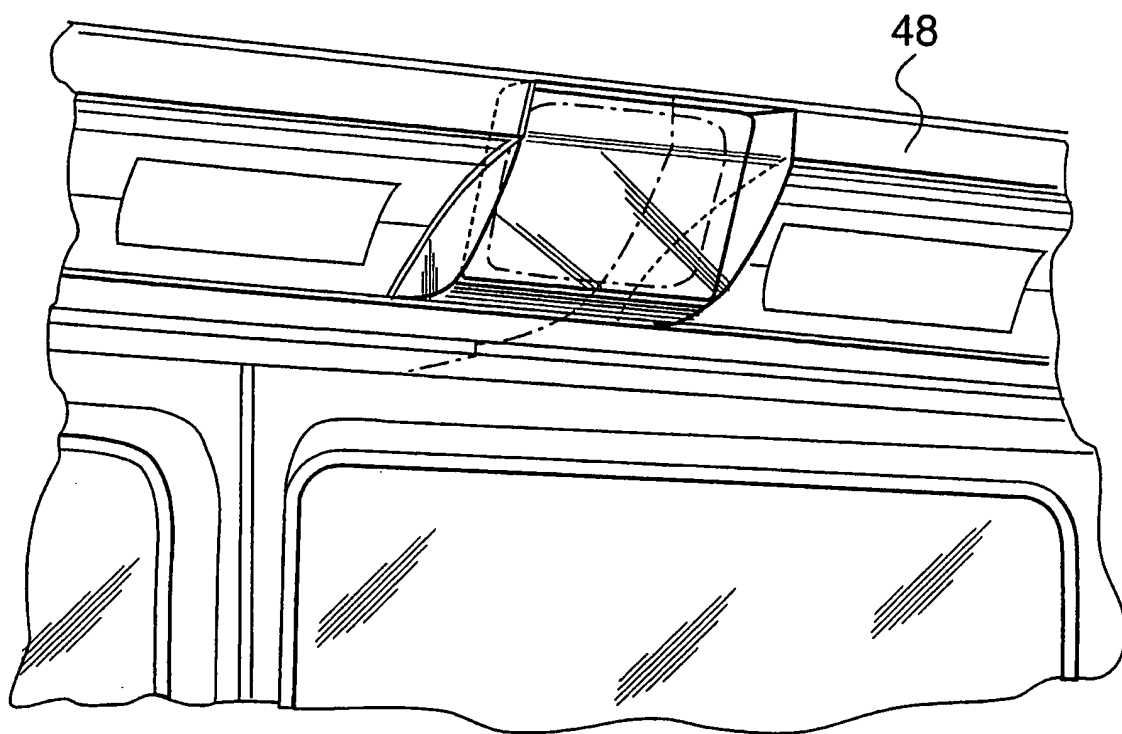


FIG. 6

6/6

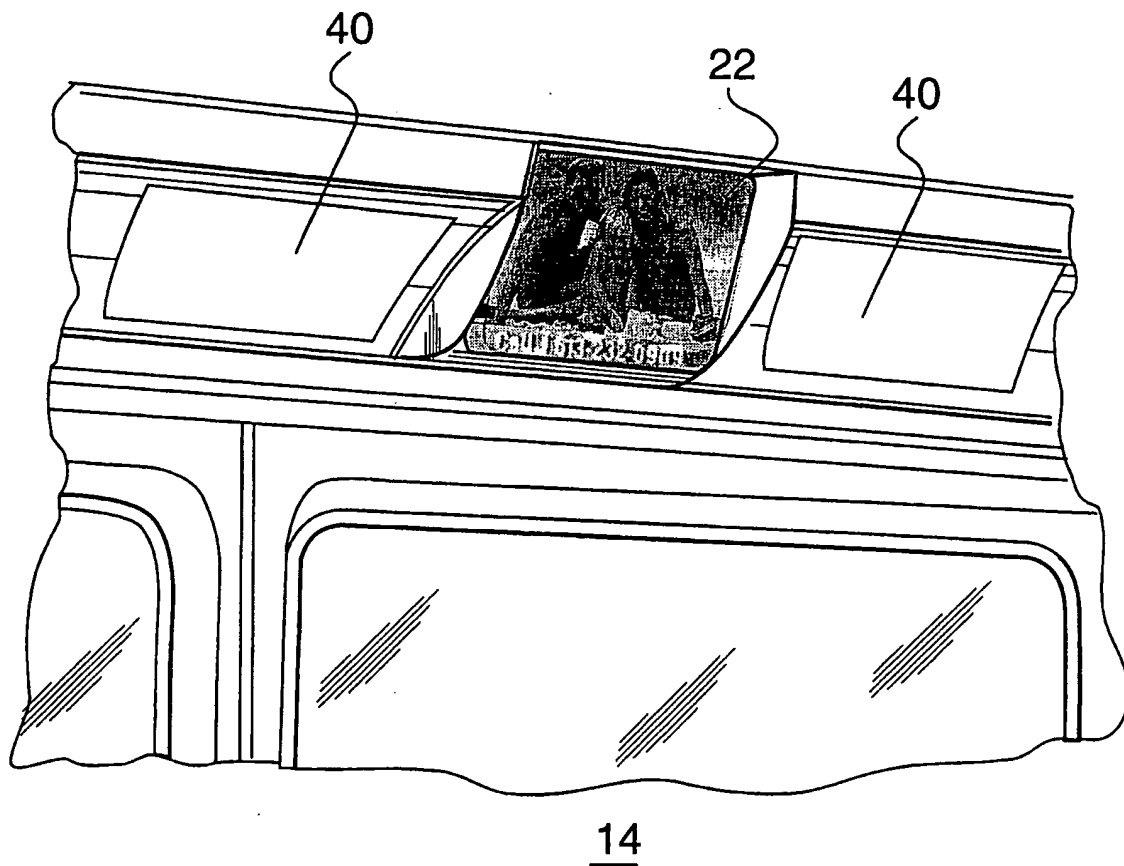


FIG. 7

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 98/00439

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04N7/18

According to International Patent Classification(IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 577 054 A (HUGHES-AVICOM INTERNATIONAL) 5 January 1994 see the whole document ---	1, 10
A	FR 2 652 701 A (COMERZAN SORIN) 5 April 1991 see the whole document -----	1, 10

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

12 August 1998

Date of mailing of the international search report

20/08/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Verleye, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. l. Application No

PCT/CA 98/00439

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 577054 A	05-01-1994	US 5311302 A	10-05-1994
		DE 69317475 D	23-04-1998
		JP 6282377 A	07-10-1994
FR 2652701 A	05-04-1991	NONE	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.